

# EclNanoPanel TWC



Compact-sized soft light, with wireless control (CRMX and W-DMX) and battery-powered



ECLNPTWCPACK

ECLNANOPANELTWC

The **EclNanoPanel TWC** is the smallest member of the successful **EclPanel** range, containing all the outstanding features of the larger format soft lights in a compact-sized, battery-operated luminaire with a surprisingly powerful 1,800-lumen output. This compact fixture has the same colour technology as the other soft lights, producing rich colours, high-quality white tones, colour gel matching, and onboard pixel cinema effects. The **EclNanoPanel TWC** has three precision encoders with multiple stand-alone control modes: CCT with +/- green shift, CCT presets, HSI for total control of hue, saturation and intensity, RAW RGBW mode, XY and FX mode, allowing to scroll through the built-in cinema effects engine. Each of the four sections has individual or simultaneous control, allowing to play customizable, cinematic effects through its FX engine or from a console. Magnetized beam-shaping optical accessories are available, including eggcrates, barndoors, diffusers, and threads for easy mounting on stands or camera rigs. The fixture is controlled from its user interface or via the built-in Wireless DMX/RDM transceiver (CRMX and W-DMX).

## MAIN FEATURES

- Compact-sized soft light with wireless control (CRMX and W-DMX) and battery-powered
- 30W RGB + Warm White LED source, surprisingly powerful 1,800 lumen output
- Magnetized beam-shaping optical accessories are available

## ECLNPTWCPACK

- 1 x ABS case
- 4 x ECLNANOPANELTWC (includes: ENPTWCFILTERLD on-board)
- 1 x 4-way charger
- 4 x position articulated joint (ENPTWCPAJ)
- 4 x barndoors (ENPTWCBD)
- 4 x Y Cable from XLR 5P male, XLR 5P female and USB-C female to USB-C male (ENPTWCYCABLE)

## TECHNICAL SPECIFICATION

### LIGHT SOURCE

- Source: 30 W RGB + Warm White
- Luminous flux: 1'829 lm @3.200 K with LD filter
- Lux: 690 lx @1 m
- CRI: 94,6 @3.200 K; 94,9 @5.600 K
- R9: 97,1 @3.200 K; 96 @5.600 K
- TLCI: 92 @5.600 K
- TM30 Rf: 97,7 @3.200 K; 89,3 @5.600 K
- TM30 Rg: 102,5 @3.200 K; 102,3 @5.600 K
- Source life expectancy: > 50.000 h

### OPTICS

- Beam angle: 105 °
- Field angle: 159 °
- Lens type: magnetic light density diffusion panel (interchangeable)
- Additional optics: see available accessories

### COLOUR SYSTEM

- Colour control: XY, CCT, RGBW, Gel, HSI, Source Emulation, colour macros, CTO on colours
- Colour mixing: RGB + Warm White
- CCT: CCT control range from 2.200K to 15.000K, + / - green correction, tungsten emulation
- White presets: 2,800 K - 10,000 K
- Colour wheel: virtual colour wheel with macros
- Macros: several pre-built pixel macros with adjustable speed

### DYNAMIC EFFECTS

- Control Resolution: 16-bit dimmer, colours
- Pixel patterns: pre-programmed pixel macros and cinema lighting effects patterns
- FX generator: 4 controllable sections
- Static mode: selection of static colour
- Manual mode: manual adjustment of intensity, CT, colour correction from knob
- Auto mode: built-in programs with execution speed adjustment
- Special features: linear crossfade channel from any white to any colour; virtual CTO on colours

### BODY

- Body: aluminium die-casting
- Body colour: black

### CONTROL

- Protocols: CRMX+W-DMX, DMX512, RDM
- Stand Alone: selectable mode through 3 rotatory knobs
- Wireless Control: included, Lumen Radio Timo Fx DMX/RDM compatible with both CRMX (Lumen Radio) and W-DMX (Wireless DMX)
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1 + ENPTWCYCABLE) not included
- IR: infrared sensor controlled by remote (included in the pack, not included in single unit)
- Master/Slave: for synchronised operation of more units linked in a chain

### ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: 0° ~ +45°
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 600 ~ 36.000 Hz

### ELECTRICAL

- Max power consumption: 32 W
- Mains power supply: DC 12V
- Power factor: >0,97

### BATTERY

- Battery: 11.1 V lithium
- Estimated battery life: (selectable) 2 h - 6 h - 8 h - 12 h - 18 h
- Re-charge connection: USB type C
- Re-charge time: 2,5 h/max
- Battery status: shown on display

### PHYSICAL

- IP rating: 20
- Cooling: passive cooling and fan-free
- Suspension and fixing: M5 and 1/4" threaded insert for easy installation
- Adaptors: USB type C to XLR connectors
- Low Voltage DC connector: USB type C
- Dimensions (WxHxD): 150x150x69,5 mm
- Weight: 1,2 kg

### CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

## ACCESSORIES & RELATED PRODUCTS


▪ ENPTWCBD	Barn door with 4 directional flaps to adjust the light beam	▪ ENPTWCYCABLE	Y Cable from XLR 5P male, XLR 5P female and USB-C female to USB-C male
▪ ENPTWCAS	Fixing system with air sucker for ECLNANOPANELTWC	▪ ENPTWCUSB	SnapBag for ECLNANOPANELTWC by DoP choice
▪ ENPTWCFILTERINT	Front intensified diffusion filter for ECLNANOPANELTWC	▪ ENPTWCWSG4SB40	40° SnapGrid for SnapBag for ECLNANOPANELTWC by DoP choice
▪ ENPTWCFILTERHD	Front high diffusion filter (less output) for ECLNANOPANELTWC	▪ 9333FXWL03	Ass. 3x2.5mm TH07 cable, SHUKO plug, SETSAC3FX socket, L.3m
▪ ENPTWCFILTERMD	Front medium diffusion filter for ECLNANOPANELTWC	▪ C6002B	Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
▪ ENPTWCFILTERLD	Front low diffusion filter (more output) for ECLNANOPANELTWC	▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black
▪ ENPTWCRMP	Rear metal plate for ECLNANOPANELTWC	▪ WSBBF1G5	BlackBox F-1 G5 transmitter, 2,45GHz & 5.2/5,8 GHz, DMX/RDM, 512Ch
▪ ENPTWCASA	Spigot adapter for ECLNANOPANELTWC	▪ WSBBF1G6	BlackBox F-1 G6 transrec, 512ch, 2.45GHz, DMX&RDM, Bluetooth, G3, G4, G4S, G5, CRMX
▪ ENPTWCPAJ	Position articulated joint for ECLNANOPANELTWC	▪ WSBBR512G5	BlackBox R-512 G5 receiver 512Ch, 2.45GHz & 5.8GHz, DMX/RDM optional
▪ ENPTWCMAG	Fixing system with magnet for ECLNANOPANELTWC and ECLSOFTTUBE100	▪ WSBBR512G6	BlackBox R-512 G6 receiver 512Ch, 2.45GHz, DMX&RDM, Bluetooth, G3, G4, G4S, G5, CRMX
▪ ENPTWCMAGADP	M10 to 1/4" adapter to use ENPTWCMAG with ECLNANOPANELTWC	▪ UPBOX1UP5	Firmware uploader kit, USB IN, 5p XLR DMX OUT, DMX OUT
▪ EST100MAGADP	M10 to M5 adapter to use ENPTWCMAG with ECLNANOPANELTWC and ECLSOFTTUBE100		
▪ EST100FY	Tripod for ECLSOFTTUBE100		
▪ ENPTWCCHARGER	Single charger for ECLNANOPANELTWC		

## PRESET FULL ON 3,200K

Beam angle 50%: LD filter

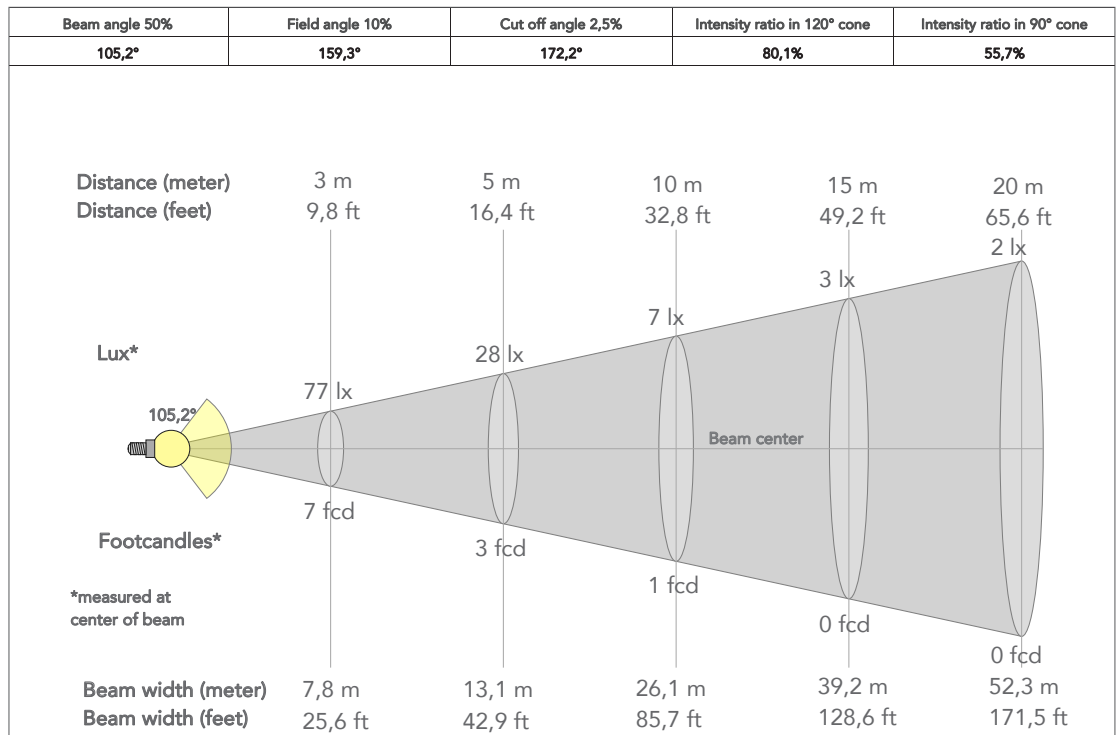

## TECHNICAL DRAWINGS

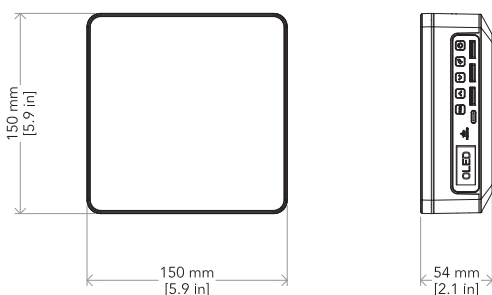

## CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573  
Certified to CSA STD: C22.2 NO. 166

Visit our website for specifications and tech documentations

